




ALP-DANTE または ALP-AES67 サウンドカードのアップデート方法

Digigram ALP-DANTE または ALP-AES67 サウンドカードを入手された場合、ご使用前にカードのファームウェアアップデートが必要となる場合があります。Windows でアプリケーション「ALP-X Manager」を実行した際に以下のメッセージが表示される場合は、このエラーが発生します。


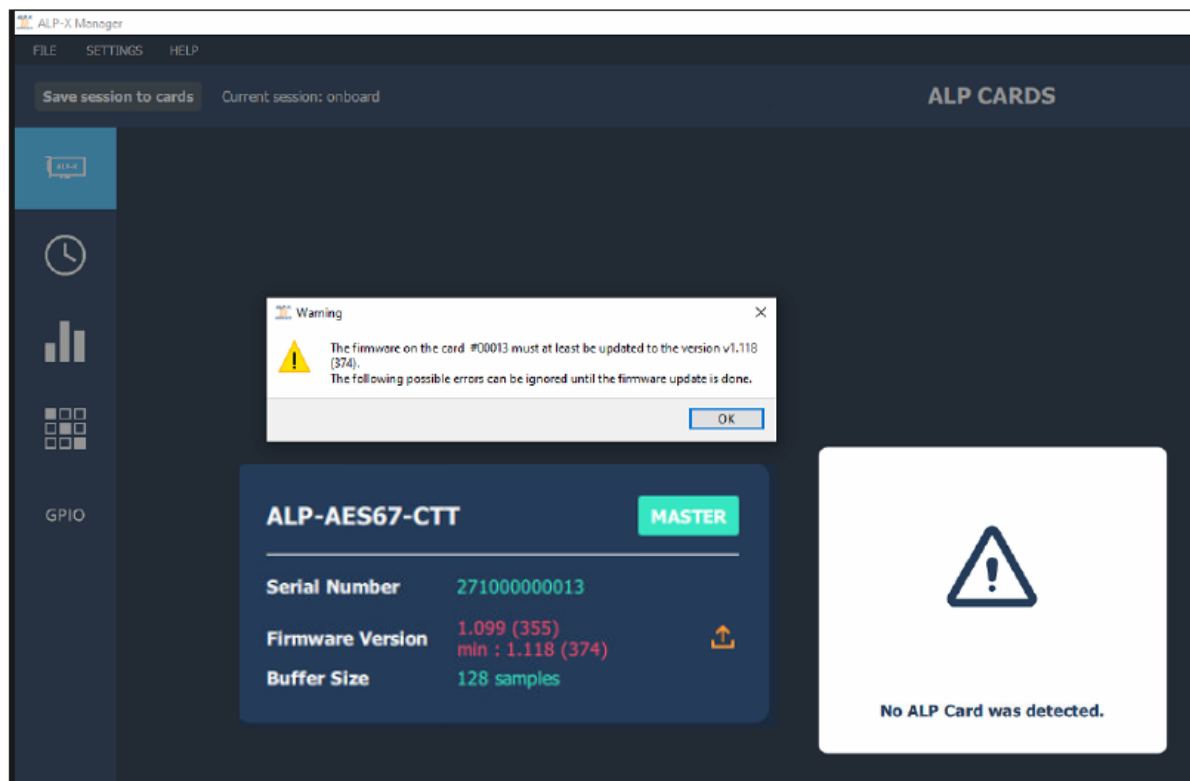


アップデートするには、PC と ALP カードを DANTE/AES67 ネットワークに接続します。

次に、AUVITRAN のウェブサイトから最新バージョンの **AVSMonitor** ソフトウェアをダウンロードしてインストールし、起動します。


<https://www.auvitran.com/fr/software/avs-monitor/>



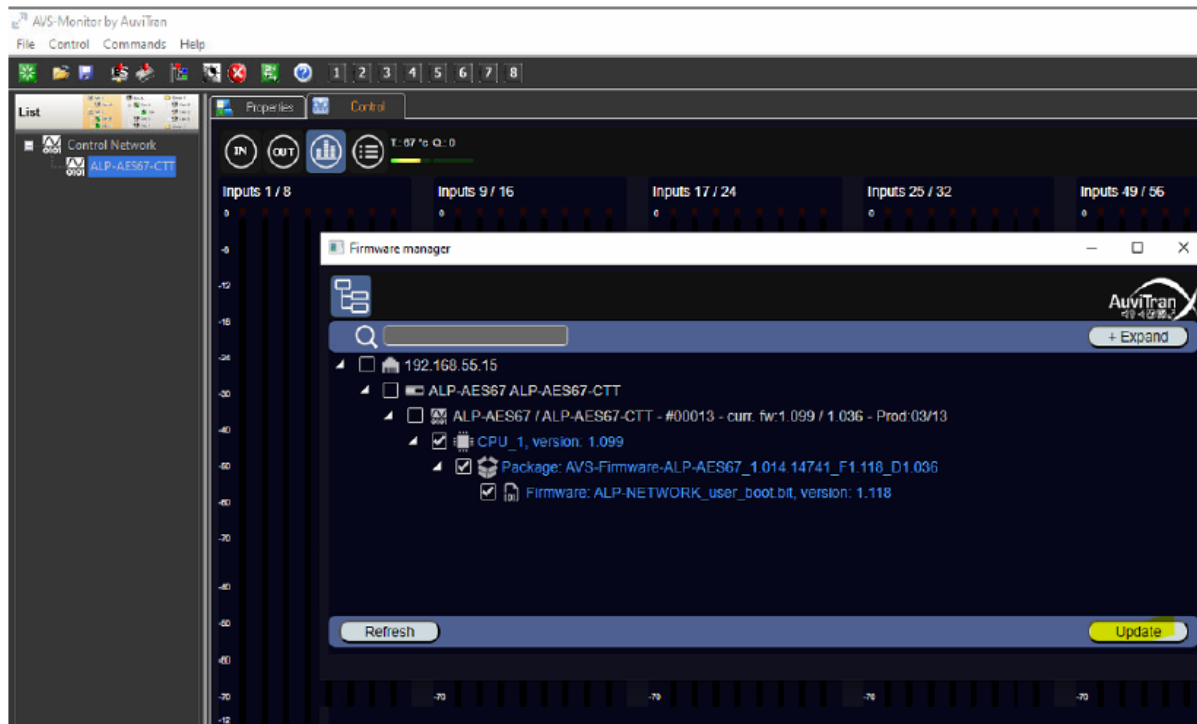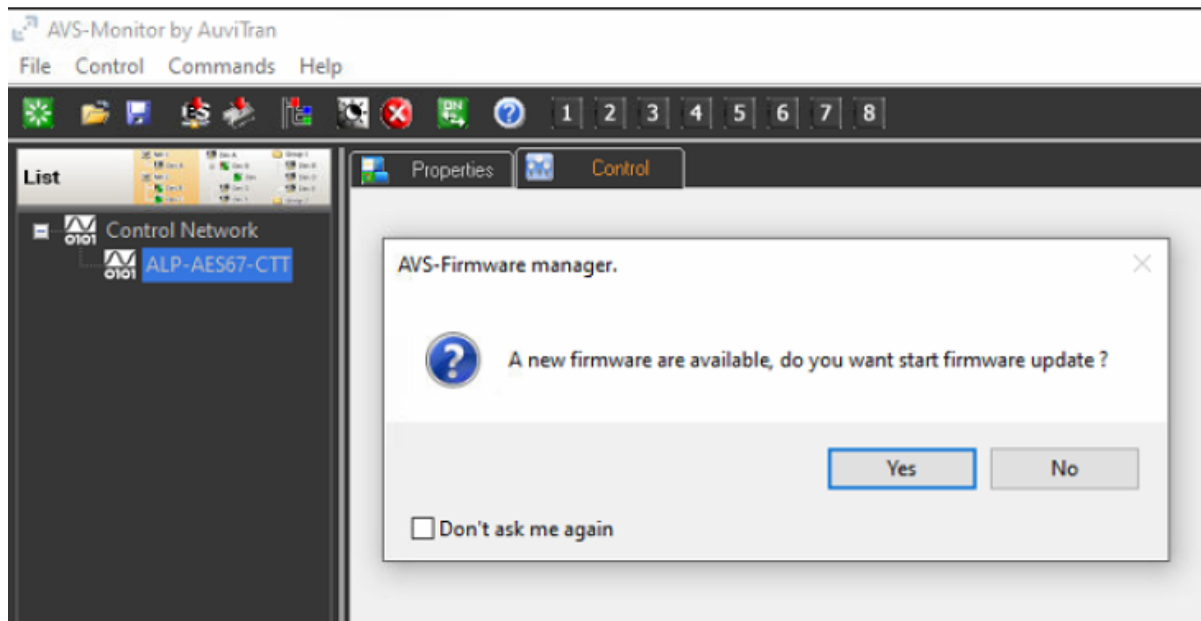


適切なデバイスを選択し、Update を押します。
この処理には数分かかります。



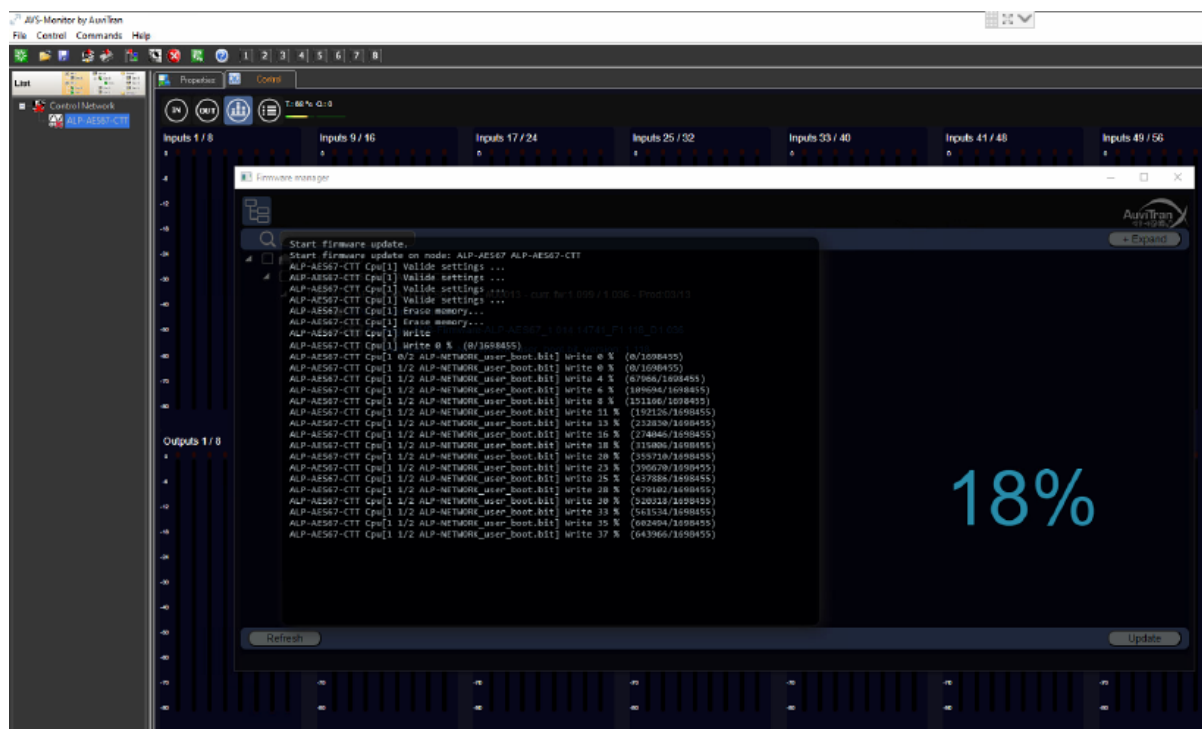

ALP カードが検出されない場合は、ネットワークに問題がある可能性があります。
ALP-DANTE をお持ちの場合は、Dante コントローラーでカードが認識されていることを確認してください。
この段階で、カードが接続されているコンピューターの電源を一度切り、再度電源を入れてください。

注意:再起動だけでは不十分です。

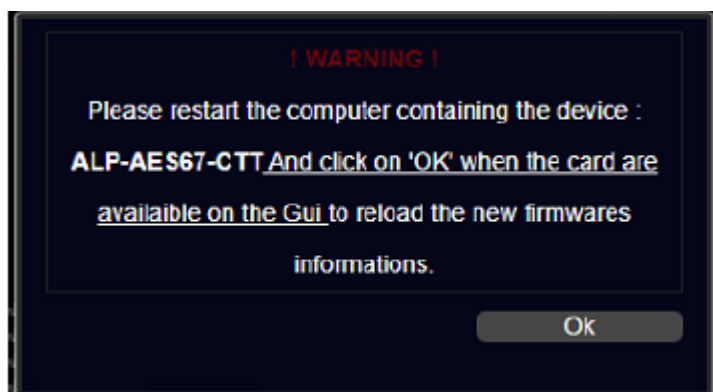

ALP-DANTEをご利用の場合、設定はDanteコントローラーを介して行われます。
ALP-AES67をご利用の場合、ALP-AES67のWebページにアクセスするために、Merging MTDDiscoveryの使用をお勧めします。





MTDiscovery

Refresh

Copyright © 2023 Merging Technologies. All rights reserved.

MT Discovery
MERGING SERVICES BONJOUR BROWSER

AMERGING
AUDIO FOR THE NEXT WORKSPACE

RAVENNA Devices

- Horus
- NADAC
- ZMAN
- ALP-AES67-CTT
- MassCore
- ASIO
- CoreAudio
- Neumann Studio Monitors
- Others
- Emotion Servers
- Pyramix Servers
- VCube MxFix Servers
- Ovation Servers
- Others

AES67 open

ALP-AES67_113136.local

Vendor Digigram
Product ALP card
Serial 113136
Identify Me

DIGIGRAM

General settings | PTP | ASIO Clock | Session sources | Session sinks | In/Outs | I/O Router | Statistics | NMOS | System

Device Name
ALP-AES67-CTT
This is the unique zeroconf device name. Other devices see this device name.

Audio Configuration

Sample rate: 48 kHz
Frame size (@1FS): 48 smpl AES67(1ms)

Session Sinks Global

Safety Playout Delay (@1FS): 0
SSM (requires IGMP v3): ☐

Network

Multi-interface mode: ☒
Note: must be checked for ST2022-7 support.

Interface 1

Link: Up
Name: Primary

Type: DHCP

Address: 192.168.230.3
Netmask: 255.255.240.0
Gateway: 192.168.224.252 ☒ Use as Primary Gateway

Apply

Interface 2

Link: Up
Name: Secondary

Type: DHCP

Address: 192.168.55.48
Netmask: 255.255.255.0
Gateway: 192.168.55.254 ☐ Use as Primary Gateway

